

TECHNICAL DATA SHEET

Eurovent **WALL PROTECT**

Single-layer vapour-permeable wind barrier. Made of a single layer of polypropylene nonwoven which ensures high vapour-permeability and UV resistance of the product. Protects façade constructions against wind, rain and moisture. Membrane is available in SYSTEM SK2 with two self-adhesive tapes.



PARAMETER	UNIT	VALUE
Vapour-permeability	[g/m <sup>2</sup> /24h]	ca. 3000
Reaction to fire		E
Time exposure	[°C]	-40 do +100
Sd value	[m]	ca. 0,02
UV resistance	[months]	4*
Mass per unit	[g/m <sup>2</sup> (±5%)]	ca. 100
Water-tightness		W3
Tensile strength MD	[N/50 mm]	≥240 (+/- 90)
Tensile strength CD	[N/50 mm]	≥160 (+/- 90)
Tear resistance MD	[N]	≥100 (+/- 90)
Tear resistance CD	[N]	≥100 (+/- 90)
Color		gray / gray
Roll size	[m x mb]	1,5 m x 50 mb = 75 m <sup>2</sup> ; 2,7 m** x 50 mb = 135 m <sup>2</sup> ; 2,8 m** x 50 mb = 140 m <sup>2</sup> ; 3,0 m x 50 mb = 150 m <sup>2</sup>
Pallet	[rolls]	50

**Advantages:**

- Wind insulation • Fast and easy installation
- UV resistance • High vapour-permeability


\* UV stabilization even up to 3 months according to artificial ageing performed in the laboratory related to the conditions of average sun exposure for the climate in Central Europe.

\*\* On order.

## Eurovent WALL PROTECT

### Application:

Membrane is designed for use as insulation against wind, rain and moisture in wall and façade constructions. Product is also suitable for application in ventilated facades and is recommended for use in log houses, timber framing and constructions of residential and industrial buildings. Preservation of venting slot between the membrane and the thermal insulation (mineral wool, fiberglass) is not required for installation – product can be installed directly on thermal insulation. Membrane must not be applied on the roof where application of roof membranes is recommended.

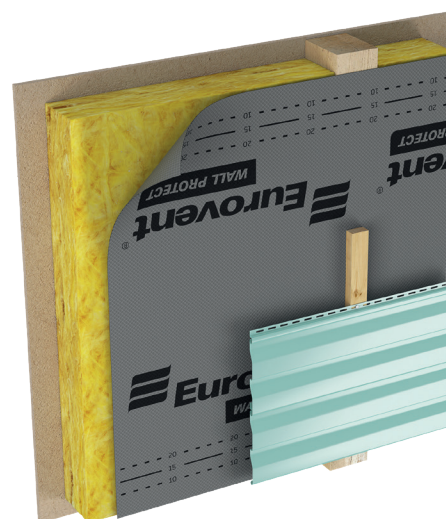

### Storage / transport:

The product should be stored in a dry place, under cover, free from moisture and UV radiation in original undamaged and closed package. Rolls should be transported in covered means of transport. They should be prepared for transport in a manner that protects them from damage and destruction. During transport safety regulations must be observed. The product should be protected from chemical agents, in particular solvent-based substances, as they can reduce technical parameters of foil or permanently damage it.

### System SK2:

Membrane is available, on demand in SYSTEM SK2 based on two integrated self-adhesive tapes. This solution facilitates installation and guarantees proper sealing of overlaps. Two complementary tapes enable durable connection of membranes in all weather conditions: at high humidity, during strong winds, in the rain, at low temperatures, on a heavily soiled membrane's surface. To gain proper sealing of overlaps, use the line which is min. 10 cm from the membranes edge.



*Contained information, advice and guidance is given based on our knowledge, researches, experience and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.*

Product information can be found on the website: [www.eurovent.de](http://www.eurovent.de)

Update date: 11/2019