


Eurovent SNOWSTOPPER SET BIBER

The set of a snow-stopping grate, the Eurovent SNOWSTOPPER SET BIBER, is a complete set ready for installation consisting of the Eurovent® SNOWSTOPPER snow-stopping grate, the Eurovent® FIX BIBER adapters and the Eurovent® CLIP connectors. The elements are made of galvanized steel, while the connections - in the TOX technology. The set is available in several colour versions painted with powder paint according to RAL chart. Designed for roofs covered with ceramic tile -beaver tile - roofing tiles.

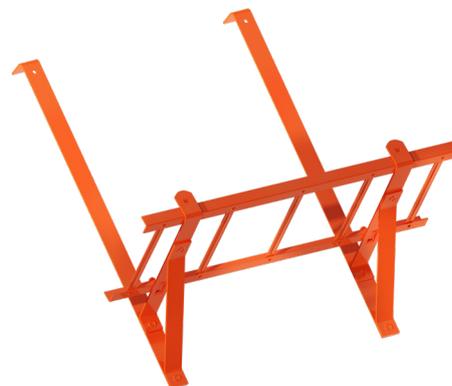

PARAMETER	UNIT	VALUE
Material		Steel grade S235JR
Coverage Type		For biber tile
The dimensions of the fence	[m]	1,0; 2,0; 3,0;
Coating thickness	[µm]	≥ 60
Corrosion protection		Hot-dip galvanized
Zinc coating thickness	[µm]	≥ 55
Colour	[RAL]	Galvanized steel; wallred 8004; brown 8017; brown 8019; anthracite 7016; black 9005; chestnut 3009; cherry 3004
Package	[pcs]	- SNOWSTOPPER SET 1,0 m: 1 SNOWSTOPPER 1,0 m + 2 FIX BIBER - SNOWSTOPPER SET 2,0 m: 2 SNOWSTOPPER 1,0 m + 4 FIX BIBER + 2 CLIP - SNOWSTOPPER SET 3,0 m: 3 SNOW STOPPER 1,0 m + 6 FIX BIBER + 4 CLIP

Advantages:

- Double protection against corrosion
 - Fast and easy installation
- For roofs covered with ceramic tile -biber tile - roofing tiles

Eurovent SNOWSTOPPER SET BIBER

Application:

The Eurovent SNOWSTOPPER SET BIBER is designed for use as a protection element against movements of mass quantities of snow from the roof slope covered with the beaver tiles – roofing tiles. The set can be applied on sloping roofs with an angle ranging from 10° to 90°. The set is packed in a cardboard box in which all installation elements are included. This in turn significantly reduces the installation time and eliminates any possible mistakes while completing the set. In the case of lengths of 2.0 m and 3.0 m, the individual elements are combined with each other with the use of special Eurovent® CLIP connectors, attached to the sets.

Storage / transport:

The product should be stored under roof in dry, damp-free rooms, protected from direct UV radiation. Product can be deformed, disfigured or suffer from damages of galvanized/paint coating if put under high pressure. Therefore it is unadvised to stack the product with other heavy products (both in storage and in transport). It is recommended to transport the product with use of covered means of transport, in manner that protects them from damage. During the transport safety regulations have to be observed. The product should be protected from chemical agents, in particular solvent-based substances, as they can reduce technical parameters of the product or permanently damage it.

The product is under warranty, providing that the guidelines included in technical data sheet are being obeyed. We reserve the right to refuse a complaint recognition in case of not following these guidelines.

Included information, advices and guidance is given based on our best knowledge, researches, experience and in good faith. We are not be held responsible for the consequences of improper or incorrect use of our products. Each user of the product shall ensure, in every possible way, including checking the end-product in given conditions, that the provided product is suitable to reach objectives he pursues.

Product information can be found on the website: www.eurovent.de

Data aktualizacji: 02/2021