

TECHNICAL DATA SHEET

Eurovent SYNTEX

Four-layer synthetic roof underlay. The membrane is characterized by increased water-tightness parameter and extreme resistance to tearing. Product contains special stabilization additives which assure an excellent UV resistance and allow to perform assembly of final roof covering with considerable delay.



PARAMETER	UNIT	VALUE
Vapour-permeability	[g/m ² /24h]	ca. 0,5
Reaction to fire		E
Temperature resistance	[°C]	-40 to +100**
Sd value	[m]	> 40
UV resistance	[month]	6*
Exposure time on UV	[week]	4
Mass per unit	[g/m ² (±5%)]	ca. 170
Water-tightness		W1
Tensile strength MD	[N/50 mm]	700 N / 50 mm (+/-100)
Tensile strength CD	[N/50 mm]	650 N / 50 mm (+/-100)
Tear resistance MD	[N]	235 (+/-60)
Tear resistance CD	[N]	280 (+/-80)
Color		Blue
Roll size	[m x rm]	1,1 x 50
Pallet	[roll]	40

Advantages:

- UV resistance • Suitable for full sarking
- Tear resistance • Water-tightness


* UV stabilization even up to 6 months according to artificial ageing performed in the laboratory related to the conditions of average sun exposure for the climate in Central Europe.

** Limited time exposure.

Eurovent SYNTEX

Application:

Underlay is designed for use as initial covering for ventilated sloping roofs with full sarking. Strongly recommended for application with bitumen and wooden shingles as well as slate. Venting slot between the membrane and the thermal insulation (mineral wool, fiberglass) must be preserved. The product must not be applied directly on thermal insulation. The final roof covering may be assembled without batten and counter-batten.

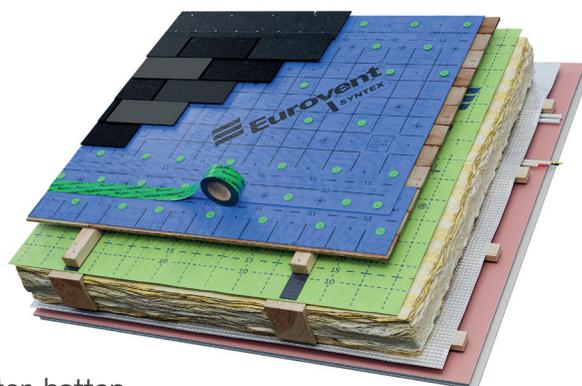

Installation recommendations / warranty:

Installation of the roof cover should be completed within 4 weeks after mounting the roofing membrane. Within 12 weeks of the installation, thermal insulation or attic blackout should be installed in the attic. The product is under warranty, providing that the guidelines contained in technical data sheet are being obeyed. We reserve the right to refuse a complaint recognition in case of not following these guidelines.

Storage / transport:

The product should be stored in a dry place, under cover, free from moisture and UV radiation in original undamaged and closed package. Rolls should be transported in covered means of transport. They should be prepared for transport in a manner that protects them from damage and destruction. During transport safety regulations must be observed. The product should be protected from chemical agents, in particular solvent-based substances, as they can reduce technical parameters of foil or permanently damage it.

System SK2:

Membrane is available, on demand in SYSTEM SK2 based on two integrated self-adhesive tapes. This solution facilitates installation and guaran-tees proper sealing of overlaps. Two complementary tapes enable durable connection of membranes in all weather conditions: at high humidity, during strong winds, in the rain, at low temperatures, on a heavily soiled membrane's surface. To gain proper sealing of overlaps, use the line which is min. 10 cm from the membranes edge.

Contained information, advice and guidance is given based on our knowledge, researches, experience and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 03/2024